




CIVIC F

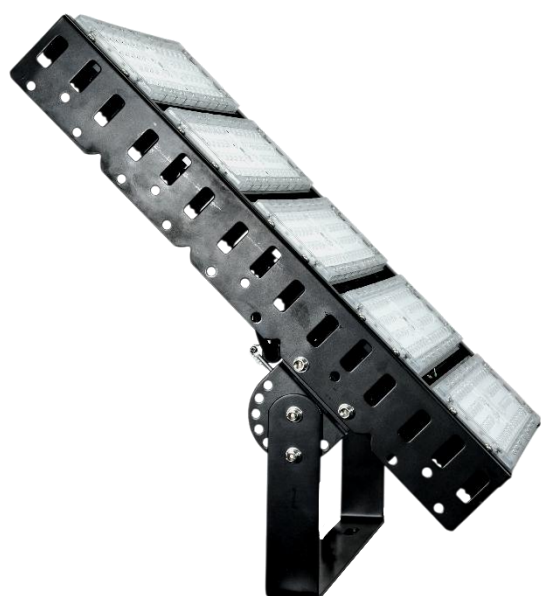

+971 65 260 706 sales-me@hansagreen.com

Hamriyah Free Zone Sharjah, UAE.

CIVIC F 250W

LED FLOOD LIGHT

- ❑ **Adjustable** Bracket – Easy installation & aiming.
- ❑ Efficient Heat Dissipation – Die-cast aluminum housing.
- ❑ Long life: 50,000+ hrs - Minimal maintenance.
- ❑ High Luminous efficacy - More light output.
- ❑ Consistent Performance & Quality - Delivers stable brightness.




CVF-FLD-0250

Technical		IK08	IP65	UGR <19	CRI >80
Chip		SMD		Bridgelux	
Luminous Efficacy (subject to a tolerance of $\pm 10\%$)		130		Lumen / Watt	
Correlated Colour Temperature (CCT)		3000/4000/6500		Kelvin	
Lifetime		50,000		Hours	
McAdam Binning		3		Step	
Housing					
Body		Aluminium		Die-cast	
Lens / Diffuser		PC Lens			
Reflector		-			
Mounting		Surface/ Pole			
Thermal					
Ambient Temperature (Ta)		-20 to 45		°Celsius	
Storage Temperature (Ts)		-20 to 50		°Celsius	
Humidity		10 to 90		RH(%)	

ELECTRICAL CHARACTERISTICS

Control Option	ON/OFF  	
Control Brand	Inventronics	On/off
Rated Power	250	Watts
Input Current (@ 230V)	1.086	Amps
Input Voltage	100 to 240	VAC
Frequency	50 to 60	Hertz
Output Current	7	A
Output Voltage	17 to 54	VDC
Power Factor	0.9	

DIMENSIONAL DETAILS

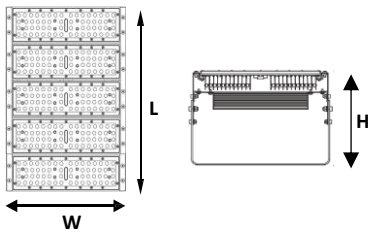

All measurements are in mm

L/D	W	H	Cutout	Weight
468	315	220	-	5.45 Kg

PHOTOMETRIC DETAILS

Beam Angle	91.5°
------------	-------

