



MAGNOR RD



MAGNOR RD 24W

LED RECESSED DOWN LIGHT

- ☐ **Diffused** Illumination – Soft, uniform, glare-free light.
- ☐ Easy installation - **Tool-free** spring-clip installation.
- ☐ Long Life: 50,000+ hrs – Minimal maintenance.
- ☐ Consistent Performance & Quality - Delivers stable brightness.
- ☐ High Luminous Efficacy - More light output.




MNR-RD-24

Technical			IK02	IP20	UGR <19	CRI ≥80
Light Source			SMD		-	
Luminous Efficacy (subject to a tolerance of ±10%)			100		Lumen / Watt	
Correlated Colour Temperature (CCT)			3000/4000/6500		Kelvin	
Lifetime			50,000		Hours	
McAdam Binning			3		Step	
Housing						
Body			Aluminium		Die-cast	
Lens / Diffuser			PC Diffuser			
Reflector			-			
Mounting			Recessed			
Thermal						
Ambient Temperature (Ta)			-20 to 45		°Celsius	
Storage Temperature (Ts)			-20 to 50		°Celsius	
Humidity			10 to 90		RH(%)	

ELECTRICAL CHARACTERISTICS

Control Option	ON/OFF	 PHASE DIMMING	 1-10V	
Control Brand	Hansagreen/Tridonic			On/off
Rated Power	24	Watts		
Input Current (@ 230V)	0.10	Amps		
Input Voltage	220 to 240	VAC		
Frequency	50 to 60	Hertz		
Output Current	650	mA		
Output Voltage	24 to 42	VDC		
Power Factor	>0.95			

DIMENSIONAL DETAILS

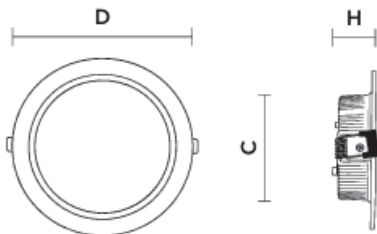

All measurements are in mm

L/D	W	H	Cutout	Weight
180Ø	-	30	145Ø	0.23 kg

PHOTOMETRIC DETAILS

Beam Angle	111.2°
------------	--------

