



ROOKIE AQUA II



+971 65 260 706 sales-me@hansagreen.com

Hamriyah Free Zone Sharjah, UAE.

ROOKIE AQUA II 20W

LED SURFACE DOWNLIGHT

- ☐ IP65 dust & water protection.
- ☐ High visual-comfort optics.
- ☐ Premium die-cast housing
- ☐ Interchangeable reflector options
- ☐ Easy surface-mount installation




CQ-II-RD-20

Technical		IK02	IP65	UGR <19	CRI >80
Light Source		COB		-	
Luminous Efficacy (subject to a tolerance of $\pm 10\%$)		100		Lumen / Watt	
Correlated Colour Temperature (CCT)		3000/4000/6500		Kelvin	
Lifetime		50,000		Hours	
McAdam Binning		3		Step	
Housing					
Body		Aluminium		Die-cast	
Lens / Diffuser		PC Lens			
Reflector		Black/White			
Mounting		Surface/Pendant			
Thermal					
Ambient Temperature (Ta)		-20 to 45		°Celsius	
Storage Temperature (Ts)		-20 to 50		°Celsius	
Humidity		10 to 90		RH(%)	

ELECTRICAL CHARACTERISTICS

Control Option	ON/OFF	PHASE DIMMING	1-10V	DALI
Control Brand	Hansagreen	On/off		
Rated Power	20	Watts		
Input Current (@ 230V)	0.08	Amps		
Input Voltage	220 to 240	VAC		
Frequency	50 to 60	Hertz		
Output Current	600	mA		
Output Voltage	24 to 48	VDC		
Power Factor	>0.95			

DIMENSIONAL DETAILS

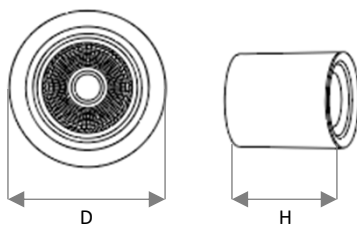

All measurements are in mm

L/D	W	H	Cutout	Weight
95Ø	-	115	-	0.47 kg

PHOTOMETRIC DETAILS

Beam Angle	27.7°
------------	-------

