



SPLASH RD



📞 +971 65 260 706 📩 sales-me@hansagreen.com

📍 Hamriyah Free Zone Sharjah, UAE.

SPLASH RD 06W

LED INGROUND LIGHT

- Stainless steel trim corrosion protection
- IP67 strong water resistance.
- IK09 drive-over durability
- Durable toughened glass for safety.
- Seamless inground installation, no obstacles




BL-06-RD

Technical	IK10	IP67	UGR <19	CRI >80
Light Source	SMD	-	-	-
Luminous Efficacy (subject to a tolerance of ±10%)	100	Lumen / Watt	-	-
Correlated Colour Temperature (CCT)	3000/4000/6500	Kelvin	-	-
Lifetime	50,000	Hours	-	-
McAdam Binning	3	Step	-	-
Housing				
Body	Stainless Steel Trim	Aluminium Die-cast body	-	-
Lens / Diffuser	Toughened Glass	-	-	-
Reflector	-	-	-	-
Mounting	Inground recessed	-	-	-
Thermal				
Ambient Temperature (Ta)	-20 to 50	°Celsius	-	-
Storage Temperature (Ts)	-20 to 50	°Celsius	-	-
Humidity	10 to 90	RH(%)	-	-

ELECTRICAL CHARACTERISTICS

Control Option	ON/OFF PHASE DIMMING 1-10V DALI
Control Brand	-
Rated Power	6
Input Current (@ 230V)	0.026
Input Voltage	220 to 240
Frequency	50 to 60
Output Current	150
Output Voltage	24 to 42
Power Factor	>0.95

DIMENSIONAL DETAILS

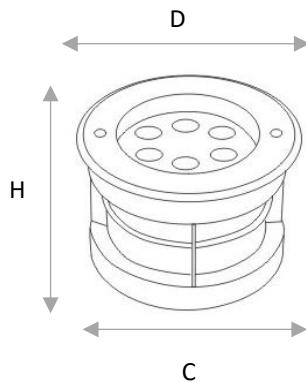

All measurements are in mm

L/D	W	H	Cutout	Weight
120Ø	-	100	115	0.74 kg

PHOTOMETRIC DETAILS

Beam Angle	31.6°
------------	-------

