



SPLASH RD TILTABLE



📞 +971 65 260 706 📩 sales-me@hansagreen.com

📍 Hamriyah Free Zone Sharjah, UAE.

SPLASH RD TILTABLE 18W

LED INGROUND LIGHT

- **Drive-Over** Rated – Safe for vehicle and foot traffic.
- **SS 316** Trim – corrosion-resistant and durable.
- **Adjustable Tilt Angle** – Direct light precisely in any desired direction.
- High Luminous efficacy - More light output.
- Long Life: 50,000+ hrs – Minimal maintenance.




BLX-18-RD

Technical	IK10	IP67	UGR <19	CRI >80
Light Source	SMD	-	-	-
Luminous Efficacy (subject to a tolerance of ±10%)	100	Lumen / Watt	-	-
Correlated Colour Temperature (CCT)	3000/4000/6500	Kelvin	-	-
Lifetime	50,000	Hours	-	-
McAdam Binning	3	Step	-	-
Housing				
Body	Aluminium	Die-cast	-	-
Lens / Diffuser	Stainless Steel Trim	Toughened Glass	-	-
Reflector	-	-	-	-
Mounting	Inground recessed	-	-	-
Thermal				
Ambient Temperature (Ta)	-20 to 50	°Celsius	-	-
Storage Temperature (Ts)	-20 to 50	°Celsius	-	-
Humidity	10 to 90	RH(%)	-	-

ELECTRICAL CHARACTERISTICS

Control Option	ON/OFF PHASE DIMMING 1-10V DALI	
Control Brand	Tridonic	On/off
Rated Power	18	Watts
Input Current (@ 230V)	0.07	Amps
Input Voltage	220 to 240	VAC
Frequency	50 to 60	Hz
Output Current	500	mA
Output Voltage	24 to 42	VDC
Power Factor	>0.95	

DIMENSIONAL DETAILS

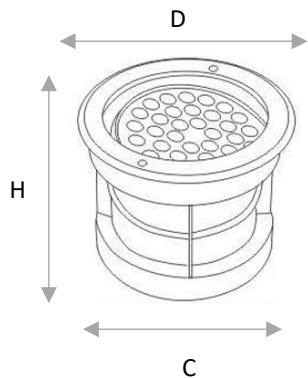

All measurements are in mm

L/D	W	H	Cutout	Weight
260Ø	-	196	240	4.18 kg

PHOTOMETRIC DETAILS

Beam Angle	31.6°
------------	-------

